

# Survey Paper on Bluetooth and Its Applications

**Ramanjeet Kaur**

Department of Computer Science and Engineering CGC-CEC, Landran, Punjab, India

## ABSTRACT

Bluetooth is an open specification for short-range wireless communication and networking, mainly intended to be a cable replacement between portable and/or fixed electronic devices. The main aim of introducing Bluetooth is to connect two or more devices without any physical connection. This helps to reduce time and human efforts for transferring data. The specification also defines techniques for interconnecting large number of nodes in scatter nets, thus enabling the establishment of a Mobile Ad hoc network (MANET). While several solutions and commercial products have been introduced for one-hop Bluetooth communication, the problem of scatter net formation has not yet been dealt with. This problem concerns the assignment of the roles of master and slave to each node so that the resulting MANET is connected. The range of Bluetooth is up to 60metres. So we are basically focusing on the idea to improve in some essential areas. In this paper we have included some important features like scatter net and piconet, Bluetooth Protocol Stack. We have also dealt with different versions of Bluetooth according to their date of release. Also we have discussed the fundamentals of communication and connection and pairing and bonding mechanisms. Our future scope area mainly focuses on power and energy saving in the future Bluetooth devices or any such equipment's. In today's era we are having gadgets using different operating systems. The pairing between the devices is not up to the mark so also aim at presenting the idea of gathering opportunities to improve upon the compatibility feature.

**Keywords:** Bluetooth, MANET, .Protocol, Frequency, hopping, dongle, piconet, scatter net, cryptography, spectrum topology, encryption.

## I. INTRODUCTION

Bluetooth is a wireless technology standard for exchanging data over short distances (using short-wavelength UHF radio waves in the ISM band from 2.4 to 2.485 GHz from fixed and mobile devices, and building (PANs). The Bluetooth wireless specification got its name from 10th-century Danish king who used diplomacy to negotiate a truce between two opposite parties. Invented by telecom vendor Ericsson in 1994 it was originally conceived as a wireless alternative to RS-232 data cables. . Bluetooth is managed by the Bluetooth Special Interest Group (SIG), which has more than 20,000 member companies in the areas of telecommunication, computing, networking, and consumer electronics. Bluetooth was standardized as IEEE 802.15.1, but the standard is no longer maintained. The SIG oversees the development of the specification, manages the qualification program, and protects the trademarks. To be marketed as a Bluetooth device, it


must be qualified to standards defined by the SIG. A network of patents is required to implement the technology, which is licensed only for that qualifying device. Bluetooth is a connective convenience. It is a high-speed, low- power microwave wireless link technology, designed to connect phones, laptops, PDAs and other portable equipment together with little or no work by the user. Unlike infra-red, Bluetooth does not require line-of-sight positioning of connected units.

## II. METHODS AND MATERIAL

### A. Bluetooth Architecture

Bluetooth is a packet based control with a master slave structure. One master may communicate with up to seven slaves in a piconet all devices share the master's clock. Packet exchange is based on the basic clock, defined by the master, which ticks at 312.5  $\mu$ s intervals.

Two clock ticks make up a slot of 625  $\mu$ s; two slots make up a slot pair of 1250  $\mu$ s. In the simple case of single-slot packets the master transmits in even slots and receives in odd slots; the slave, conversely, receives in even slots and transmits in odd slots. Packets may be 1, 3 or 5 slots long, but in all cases the master transmit will begin in even slots and the slave transmit in odd slots.

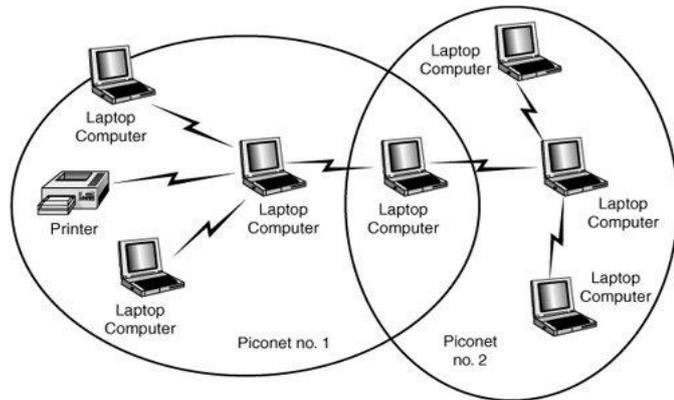

Communication and connection A master Bluetooth device can communicate with a maximum of seven devices in a piconet (an ad-hoc computer network using Bluetooth technology), though not all devices reach this maximum. The devices can switch roles, by agreement, and the slave can become the master (for example, a headset initiating a connection to a phone will necessarily begin as master, as initiator of the connection; but may subsequently prefer to be slave). The Bluetooth Core Specification provides for the connection of two or more piconets to form a scatternet, in which certain devices simultaneously play the master role in one piconet and the slave role in another. At any given time, data can be transferred between the master and one other device (except for the little-used broadcast mode.) The master chooses which slave device to address; typically, it switches rapidly from one device to another in a round robin fashion. Since it is the master that chooses which slave to address, whereas a slave is (in theory) supposed to listen in each receive slot, being a master is a lighter burden than being a slave. Being a master of seven slaves is possible; being a slave of more than one master is difficult. The specification is vague as to required behaviour in scatter nets.

## B. Versions

### Bluetooth v1.0 and v1.0B

Versions 1.0 and 1.0B had many problems, and manufacturers had difficulty making their products interoperable. Versions 1.0 and 1.0B also included mandatory Bluetooth hardware device address (BD\_ADDR) transmission in the Connecting process (rendering anonymity impossible at the protocol level), which was a major setback for certain services planned for use in Bluetooth environments.

**A. Bluetooth v1.1** · Many errors found in the 1.0B specifications were fixed. · Added possibility of non-encrypted channels. · Received Signal Strength Indicator (RSSI)

**B. Bluetooth v1.2** Faster Connection and Discovery Adaptive Frequency Hopping spread spectrum (AFH), this improves resistance to radio frequency interference by avoiding the use of crowded frequencies in the hopping sequence. Higher transmission speeds in practice, up to 721 kbit/s, than in v1.1. · Extended Synchronous Connections (eSCO), which improve voice quality of audio links by allowing retransmissions of corrupted packets, and may optionally increase audio latency to provide better concurrent data transfer.

## 2. Bluetooth v2.0 + EDR

This version of the Bluetooth Core Specification was released in 2004. The main difference is the introduction of an Enhanced Data Rate (EDR) for faster data transfer. The nominal rate of EDR is about 3 Mbit/s, although the practical data transfer rate is 2.1 Mbit/s. EDR uses a combination of GFSK and Phase shift Keying modulation (PSK) with two variants,  $\pi/4$ -DQPSK and 8DPSK EDR can provide a lower power consumption through a reduced duty cycle. The specification is published as "Bluetooth v2.0 + EDR" which implies that EDR is an optional feature. Aside from EDR, there are other minor improvements to the 2.0 specification, and products may claim compliance to "Bluetooth v2.0" without supporting the higher data rate. At least one commercial device states "Bluetooth v2.0 without EDR" on its data sheet.

### C. Bluetooth v2.1 + EDR

Bluetooth Core Specification Version 2.1 + EDR were adopted by the Bluetooth SIG on 26 July 2007. The headline feature of 2.1 is securing simple pairing (SSP):

this improves the pairing experience for Bluetooth devices, while increasing the use and strength of security. See the section on Pairing below for more details.

2.1 allows various other improvements, including "Extended inquiry response" (EIR), which provides more information during the inquiry procedure to allow better filtering of devices before connection; and sniff sub rating, which reduces the power consumption in low-power mode.

### **3. Bluetooth v3.0 + HS**

Version 3.0 + HS of the Bluetooth Core Specification] was adopted by the Bluetooth SIG on 21 April 2009. Bluetooth 3.0+HS provide theoretical data transfer speeds of up to 24 Mbit/s, though not over the Bluetooth link itself. Instead, the Bluetooth link is used for negotiation and establishment, and the high data rate traffic is carried over a collocated 802.11 link. The main new feature is AMP (Alternative MAC/PHY), the addition of 802.11 as a high speed transport. The High-Speed part of the specification is not mandatory, and hence only devices sporting the "+HS" will actually support the Bluetooth over 802.11 high-speed data transfer. A Bluetooth 3.0 device without the "+HS" suffix will not support High Speed, and needs to only support a feature introduced in Core Specification Version 3.0 or earlier Core Specification Addendum .

### **4. Bluetooth v4.0**

The Bluetooth SIG completed the Bluetooth Core Specification version 4.0 (called Bluetooth Smart) and has been adopted as of 30 June 2010. It includes Classic Bluetooth, Bluetooth high speed and Bluetooth low energy protocols. Bluetooth high speed is based on Wi-Fi, and Classic Bluetooth consists of legacy Bluetooth protocols. Bluetooth Low Energy, previously known as Wibree, is a subset of Bluetooth v4.0 with an entirely new protocol stack for rapid build-up of simple links. As an alternative to the Bluetooth standard protocols that were introduced in Bluetooth v1.0 to v3.0, it is aimed at very low power applications running off a coin cell. Chip designs allow for two types of implementation, dual-mode, and single-mode and enhanced past versions. The provisional names Wibree and Bluetooth ULP (Ultra Low Power) were abandoned and the BLE name was used for a while. In late 2011, new logos "Bluetooth Smart Ready" for hosts and "Bluetooth Smart" for

sensors were introduced as the general-public face of BLE. In a single-mode implementation; only the low energy protocol stack is implemented.

### **Bluetooth v4.1**

The Bluetooth SIG announced formal adoption of the Bluetooth 4.1 specification on 4 December 2013. This specification is an incremental update to Bluetooth Specification v4.0. The update incorporates Bluetooth Core Specification Addenda (CSA 1, 2, 3 & 4) and adds new features which improve consumer usability with increased co-existence support for LTE, bulk data exchange rates, and aid developer innovation by allowing devices to support multiple roles simultaneously.

New features of this specification include:

1. Mobile Wireless Service Coexistence Signalling
2. Train Nudging and Generalized Interlaced Scanning
3. Low Duty Cycle Directed Advertising
4. L2CAP Connection Oriented and Dedicated Channels
5. Dual Mode and Link Layer Topology
6. 802.11n PAL
7. Audio Architecture Updates for Wide Band Speech
8. Fast Data Advertising Interval
9. Limited Discovery Time.
10. Upgradeable.
11. Automatic.
12. Universally accepted.
13. Avoids interference from other wireless devices.

### **C. Bluetooth VS. WI-FI (IEEE 802.11)**

Bluetooth and Wi-Fi have some similar applications: setting up networks, printing, or transferring files. Wi-Fi is intended as a replacement for high speed cabling for general LAN access in work areas. This category of applications is sometimes called WLAN. Bluetooth was intended for portable equipment and its applications. The category of applications is outlined as the WPAN. Bluetooth is a replacement for cabling in a variety of personally carried applications in any setting and also works for fixed location applications such as smart energy functionality in the home (thermostats, etc.). Wi-Fi and Bluetooth are to some extent complementary in their applications and usage. Wi-Fi is usually access point-centered, with an asymmetrical client-server connection with all traffic routed through the access point, while Bluetooth is usually symmetrical, between two Bluetooth devices. Bluetooth serves well in simple applications where two devices need to connect with

minimal configuration like a button press, as in headsets and remote controls, while Wi-Fi suits better in applications where some degree of client configuration is possible and high speeds are required, especially for network access through an access node. However, Bluetooth access points do exist and ad-hoc connections are possible with Wi-Fi though not as simply as with Bluetooth.

#### **D. Applications**

A. Wireless control of and communication between a mobile phone and a hand free headset. This was one of the earliest applications to become popular.

B. Wireless control of and communication between a mobile phone and a Bluetooth compatible car stereo system.

C. Wireless control of and communication with tablets and speakers such as iPad and Android devices.

D. Wireless Bluetooth headset and Intercom idiomatically, a headset is sometimes called "a Bluetooth".

E. Wireless networking between PCs in a confined space and where little bandwidth is required. F. Wireless communication with PC input and output devices, the most common being the mouse, keyboard and Printer.

H. Replacement of previous wired RS-232 serial communications in test equipment, GPS receiver's medical equipment, bar code scanners, and traffic control devices.

I. For controls where infrared was often used.

J. For low bandwidth applications where higher USB bandwidth is not required and cable-free connection desired.

K. Sending small advertisements from Bluetooth-enabled advertising hoardings to other, discoverable, Bluetooth devices.

L. Dial-up internet access on personal computers or PDAs using a data-capable mobile phone as a wireless modem.

M. Short range transmission of health sensor data from medical devices to mobile phone, SET TOP BOX or other devices.

N. Real-time location systems (RTLS) are used to track and identify the location of objects in real-time using "Nodes" or "tags" attached to, or embedded in the objects tracked, and "Readers" that receive and process the wireless signals from these tags to determine their locations.

O. Personal security application on mobile phones for prevention of theft or loss of items. The protected item has a Bluetooth marker (e.g., a tag) that is in constant communication with the phone. If the connection is broken (the marker is out of range of the phone) then an alarm is raised. This can also be used as a man overboard alarm. A product using this technology has been available since 2009.

#### **E. Setting Up Connections**

Any Bluetooth device in discoverable mode will transmit the following information on demand:

1. Device name
2. Device class
3. List of services
4. Technical information

Any device may perform an inquiry to find other devices to connect to, and any device can be configured to respond to such inquiries. However, if the device trying to connect knows the address of the device, it always responds to direct connection requests and transmits the information shown in the list above if requested. Use of a device's services may require pairing or acceptance by its owner, but the connection itself can be initiated by any device and held until it goes out of range. Some devices can be connected to only one device at a time, and connecting to them prevents them from connecting to other devices and appearing in inquiries until they disconnect from the other device.

Every device has a unique 48-bit address. However, these addresses are generally not shown in inquiries. Instead, friendly Bluetooth names are used, which can be set by the user. This name appears when another user scans for devices and in lists of paired devices.

Most cellular phones have the Bluetooth name set to the manufacturer and model of the phone by default. Most cellular phones and laptops show only the Bluetooth names and special programs are required to get additional information about remote devices. This can be confusing as, for example, there could be several cellular phones in range named T610.

#### **F. Pairing and Bonding**

Many of the services offered over Bluetooth can expose private data or allow the connecting party to control the Bluetooth device. For security reasons it is necessary to be able to recognize specific devices and thus enable

control over which devices are allowed to connect to a given Bluetooth device. At the same time, it is useful for Bluetooth devices to be able to establish a connection without user intervention (for example, as soon as they are in range).

To resolve this conflict, Bluetooth uses a process called bonding, and a bond is generated through a process called pairing. The pairing process is triggered either by a specific request from a user to generate a bond (for example, the user explicitly requests to "Add a Bluetooth device"), or it is triggered automatically when connecting to a service where (for the first time) the identity of a device is required for security purposes. These two cases are referred to as dedicated bonding and general bonding respectively.

Pairing often involves some level of user interaction; this user interaction is the basis for confirming the identity of the devices. Once pairing successfully completes, a bond will have been formed between the two devices, enabling those two devices to connect to each other in the future without requiring the pairing process in order to confirm the identity of the devices. When desired, the bonding relationship can later be removed by the user.

### III. RESULTS AND DISCUSSION

#### A. Implementation

During the pairing process, the two devices involved establish a relationship by creating a shared secret known as a link key. If a link key is stored by both devices they are said to be paired or bonded. A device that wants to communicate only with a bonded device can cryptographically authenticate the identity of the other device, and so be sure that it is the same device it previously paired with. Once a link key has been generated, an authenticated Asynchronous Connection Less (ACL) link between the devices may be encrypted so that the data that they exchange over the airwaves is protected against eavesdropping.

Link keys can be deleted at any time by either device. If done by either device this will implicitly remove the bonding between the devices; so it is possible for one of the devices to have a link key

stored but not be aware that it is no longer bonded to the device associated with the given link key. Bluetooth services generally require either encryption or authentication, and as such require pairing before they allow a remote device to use the given service. Some services, such as the Object Push Profile, elect not to explicitly require authentication or encryption so that pairing does not interfere with the user experience associated with the service use-cases.

#### B. Pairing Mechanisms

Pairing mechanisms have changed significantly with the introduction of Secure Simple Pairing in Bluetooth v2.1. The following summarizes the pairing mechanisms:

- **Legacy pairing:** This is the only method available in Bluetooth v2.0 and before. Each device must enter a PIN CODE pairing is only successful if both devices enter the same PIN code. Any 16-byte UTF-8 string may be used as a PIN code; however, not all devices may be capable of entering all possible PIN codes.
- **Limited input devices:** The obvious example of this class of device is a Bluetooth Hands-free headset, which generally have few inputs. These devices usually have a fixed PIN, for example "0000" or "1234" that are hard-coded into the device.
- **Numeric input devices:** Mobile phones are classic examples of these devices. They allow a user to enter a numeric value up to 16 digits in length.
- **Alpha-numeric input devices:** PCs and smartphones are examples of these devices. They allow a user to enter full UTF-8 text as a PIN code. If pairing with a less capable device the user needs to be aware of the input limitations on the other device, there is no mechanism available for a capable device to determine how it should limit the available input a user may use.
- **Secure Simple Pairing (SSP):** This is required by Bluetooth v2.1, although a Bluetooth v2.1

device may only use legacy pairing to interoperate with a v2.0 or earlier device.

devices that might not have wireless connectivity without it.

#### **IV. FUTURE SCOPE**

Since the formation of the original group, more than 1800 manufacturers have joined the initiative worldwide. According to one market research report, Bluetooth technology is expected to be built into over 200 million devices before the end of 2014. [4] As a result of success of WAP (Wireless Application Protocol), adoption of smart phones and handheld devices, Bluetooth will have tremendous effects on everyday life. Bluetooth is one of the key technologies that can make the mobile information society possible, blurring the boundaries between home, the office, and the outside world. The seamless connectivity promised by Bluetooth makes it possible to explore a range of interactive and highly transparent personalized services which were even difficult to dream of because of the complexity involved in making various devices talk to each other. Already many Bluetooth pilot products have rolled into the market backed by big vendors, which is a very healthy sign for the acceptance of the technology. The support for Bluetooth is not limited to companies developing Bluetooth enabled products only. Bluetooth applications can have far reaching impacts on many other industries as well. Bluetooth technology adoption is expected to be widespread throughout the computer and telecommunications industry. Implementation of the Bluetooth technology is expected to grow the market for personal mobile devices and indirectly increase airtime usage for wireless data. The current speed of Bluetooth is low and this needs to be incremented. The technologists are trying their best in this field.

#### **V. CONCLUSION**

Bluetooth is thus a powerful technology using air interface to make pairing possible between devices. It allows us to exchange files, text, images, etc. over a network with range of about 60 meters. It can be used as portable or fixed device. Also the enhanced security techniques have built trustworthiness for data transfer. The cost and competition from other standards have hindered the widespread acceptance, but Bluetooth does offer a viable solution to many