

# Home Assist Robot by Using e-Yantra and IOT

Pranoti D. Joge, Dr. Smita A. Nagtode

Department Electronics and Telecommunication, D.M.I.T.E.R. Sawangi (Meghe), Wardha, Maharashtra, India

## ABSTRACT

This paper presents floor cleaning robot used for cleaning the surface. It can be used for domestic and industrial purpose. The main feature of this robot is e-Yantra robot and the main component here is the AVR Atmega 2560 microcontroller, which controls and supervises all process. The robot can perform its work using IoT. It avoid obstacles while cleaning. This new structure using e-Yantra is efficient and manageable according to our needs. It will be useful in improving the lifestyle of human being.

**Keywords:** e-Yantra, IoT, Atmega 2560.

## I. INTRODUCTION

For the last few decades, automatic robots-vehicles are becoming very famous and common in R&D, Industries and home. The research paper details the development of E-Yantra floor cleaner also the generalise study of e-yantra robot, its specification and interfacing programming which required to complete this project. E-Yantra is the advanced robotic platform having number of functionality. There is direct provision in the e Yantra robot to interface the servo motor along with the serial communication through RS232 so there is no need to use two controllers for operation of system.

The project is used for domestic and industrial purpose to clean the surface automatically. When it is turned ON, it clean the dust by moving all around the surface (floor or any other area) as it passes over it. The controller is used to drive the motors and sensors are used to avoid the obstacles. This can be useful in improving the lifestyle of mankind.

In the modern world, the Automatic Floor Cleaner is required. Thus, the cleaner is designed in such a way that it is capable of cleaning the area reducing the human effort just by starting the cleaning unit. In the

paper, main focus is to build and program it in such a way, that it can move around freely and clean a specific area. It uses IR sensors to detect the obstacles and hence change its direction while moving and also preventing the cleaner to fall from height. Using a cleaner mobile robot for house cleaning is more and more popular in household work recently. There are many brands of cleaner robots in the market for to help people to do a tedious cleaning job. From the viewpoint of the user, a cleaner robot need design useful functions which consist of automatic cleaning whole area, automatic home returning and automatic service at time schedule user had determined.

The home return function of cleaner robot is also one of the factor for automatic completely in customer using. The cleaner robots are worked on each different house that means cleaner robots are serviced in unknown environment. That reason makes cleaner robots home return become more and more complication. The presented method can easily figure out the home and the orientation under unknown environment. This robot is small in size, light in weight and can clear an area in a domestic environment. Robotic cleaning systems have the characteristics of being driven differentially. The

floor cleaning robot is an integration of moving mechanism, cleaning mechanism, control system. Robot is an electromechanical machine and used for various roles in industrial and domestic applications. Many related appliances from different companies have been followed. Initially the main focus was on having a cleaning device. As the time pass on many improvements were made and more efficient appliances were developed.

## II. LITERATURE REVIEW

[1]The paper presents a floor cleaning robot equipped with Swedish wheels. It can be used in crowded places such as houses, train station, airport etc. the robot can perform its work in autonomous and teleoperated mode. Moreover the robot can pivot around without turning, can avoid obstacles and is provided with automatic power management ability. And meanwhile, the kinematics for its control and controlling methods are studied and demonstrated. This new structure, smooth locomotion capability and high working efficiency are verified by experimentation. In the early 90s, Denning Company and Windsor Industry Company of America developed a kind of cleaning robot called RoboScrub. The robot use ultrasonic range finders for obstacle detection and feature extraction. In addition they are provided with high precision laser based navigation system. This paper presents a new floor cleaning robot, which can move along all direction by its Swedish wheels and has four cleaners with automatic switching capability. The robot can move longitudinally and laterally, pivot around and move toward arbitrary direction.

[2] The paper describes a small bot for home floor cleaning, and make simple algorithm for the robot to any out the cleaning. Robots arc increasingly desired for various tasks in many fields. Recently, a cleaning bot is developed and is noticed in the station or office building. However it is very difficult to manufacture a small cleaning bot available in the house floor. Because  $h$  complex structure is required to collect the

refuse and to control the robot based on various sensors. The target of this study is the small robot, and then the bot should be loaded with light parts or sensors. Although general navigation for autonomous mobile bot is based on ultrasonic sensor vision. However, in this study it is attempted IO navigate based on only a simple switch sensor.

[3]The paper presents many related appliances from various companies have been followed. Initially the main focus was on having a cleaning device. As the time pass on many improvements were made and more efficient appliances were developed. In early, 2010 a new automatic floor cleaner robot "Mint" was developed by Jen Steffen. Detachable clothes were attached for sweeping and mopping purposes. For tracking mint used the GPS-like indoor localization system.

[4]The paper presents a dynamic coordinate method for home return of cleaner mobile robot when the work of cleaner robot is finished or the battery charging is necessary. The salient features of the dynamic coordinate calculating for cleaner robot home return are which provides with easy implement, high reliability, efficiency and coat cheap. The orientation and position coordinate of the cleaner robot will be easily calculated by the proposed method whatever cleaner robot which moving in any location under unknown environment area. That means we can figure out the position coordinate and direction angle of the cleaner robot in real time condition. Based on the dynamic coordinate method, the cleaner robot can easily find an efficient and the shortest way for home returning. The numerical results demonstrate the proposed method which is useful for home returning of cleaner robot.

## III. PROBLEM FORMULATION

In today's era, the cost of cleaning a floor from labour is high. Naturally, the high cost of this simple task has inspired alternative solutions. No man power required and we also monitor it on remote place.

## IV. METHODOLOGY

The objective of this project are. Making and design floor cleaning robot by using e-yantra monitored by IOT application. Cleaning schedule monitor by application. To achieve this objective the methodology is given below.

### ✓ E-YANTRA Module

E-Yantra is the robotic platform which is designed and developed by the IIT, Bombay for learning and education purpose. It is the advanced robotic platform having number of functionality already built in it. Along with that there is provision in the system that one can interface the external hardware on it for different application.

### ✓ The Major Components needed for Designing a Robot

**Sensors:** For Sensing the environments.

**Actuators:** For Movement of robots and its parts.

**Control:** Controller/Processor as brain of Robot.

**Intelligence:** User Written Command to perform desired set of action.

**Power:** A necessity for making a system work.


**Communication:** Robot can talk to another robot/PC.

### ✓ Flavors of E-yantra robot

1. Master: P89v51RD2 Slave: ATmega2560
2. Master: ATmega 2560 Slave: ATmega 8
3. Master: LPC 2148 Slave: 2 x ATmega 8



**Figure 1.** Firebird V Atmega 2560 Platform

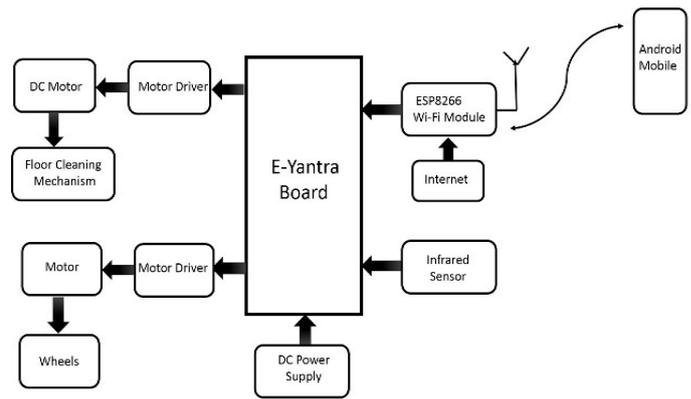

**Figure 2.** Block diagram of project

### ✓ Programming Software Atmel studio 6.0

Atmel Studio is the new integrated development environment from Atmel. It provides you a modern and powerful environment for doing AVR and ARM development. Get started by exploring the included example projects. Run your solution on a starter or evaluation kit. Program and debug your project with the included simulator, or use one of the powerful on-chip debugging and programming tools from Atmel. Get productive with the various navigate, refactor and intelligence features in the included editor. Experience seamless integration with various Atmel WEB services like Atmel Video Lounge, Atmel Store and datasheets to keep you updated and help you to design your solutions. With strong extension possibilities and online gallery, it is possible for both designers and 3rd party to provide plug-ins and customize the environment for best use and productivity. Atmel Studio carries and integrates the GCC tool chain for both AVR and ARM, Atmel Software framework, AVR assembler and simulator. All newest Atmel tools are supported including AVR ONE!, JTAGICE mkII, JTAGICE3, STK500, STK600, QT600, AVRISP mkII, AVR Dragon and SAM-ICE.

## V. APPLICATIONS

e-Yantra robot used in industry, at home, at company for cleaning purpose.

## VI. CONCLUSION

This research facilitates efficient floor cleaning operations and detail study of the e-yantra bot. Also the interfacing will be done with the help programming language. This robot works in automatic modes for user convenience. This proposed work provides the obstacle detection in case of any obstacle that comes in its way. IOT provide wireless communication between user and e-yantra floor cleaning robot. If there is obstacle in the way of robot, it sends the information to the user which gets displayed on the LCD. An automatic water sprayer is attached which sprays water for mopping purpose for the convenience of user. It reduces the labour cost and saves time also and provides efficient cleaning.

## VII. REFERENCES

- [1]. Xueshan Gao, and Koki Kikuchi. Study on a Kind of Wall Cleaning Robot. Proceedings - 2004 IEEE International Conference on Robotics and Biomimetics, IEEE ROBIO, 391-394 (2004).
- [2]. Ynng loo Oh and Yoshio Watanabe "Development of Small Robot for Home Floor Cleaning" PR0001/02/0000/2002 SICE Aug 5-7,2002
- [3]. Manreet Kaur, Preeti Abrol "Design and Development of Floor Cleaner Robot (Automatic and Manual)" International Journal of Computer Applications (0975 - 8887) Volume 97- No.19, July 2014.
- [4]. Yuan-Lin Chen<sup>1</sup>, Shun-Chung Wang, Yi-Hua Luo<sup>1</sup> and Li-Tung Lu<sup>1</sup> "Dynamic Coordinate Method for Home Return of Cleaner Robot" IEEE 978-1-4244-8039-5/2011
- [5]. Yu Lin, Xiaoyong Lin and Shiqiang Zhu, "Combined Coverage Path Planning for Autonomous Cleaning Robots in Unstructured Environments", Proceedings of the 7th World Congress on Intelligent Control and Automation, June 25-27, 2008. Chongqing, China, Pp 8271-8276.
- [6]. J Frolizzi C. Disalvo. Service robots in the domestic environment: A study of Roomba vacuum in the home". In int. conference on human robot interaction HRI, PAGE 258-265 March 2006.
- [7]. Evolution Robotics Inc. Introducing Mint-the evolution of floor care, www.mintcleaner.com,2011.
- [8]. Jens-Steffen Gutmann, Kristen Culp, Mario E. Munich and Paolo Pirjanian. The Social Impact of a Systematic Floor Cleaner. In IEEE international workshop on advance robotics and its social impacts, Technische University munchen, Germany May 21-23, 2012.
- [9]. Uman Khalid,Muhammad Faizan Baloch , Haseeb Haider , Muhammad Usman Sardar , Muhammad Faisal Khan, Abdul Basit Zia<sup>1</sup> and Tahseen Amin Khan Qasuria Faculty of Electronic Engineering, Ghulam Ishaq Khan "Smart Floor Cleaning Robot (CLEAR)" Institute of Engineering Sciences and Technology, Pakistan Hamdard Institute of Engineering & Technology, Hamdard University, Karachi, Pakistan 2015