

Breast Cancer Detection Using Cluster Algorithm and Topology Creation

A. Nandhini, V. J. Arul Karthick

Department of Electronics and Communication Engineering, SNS College of Technology, Tamilnadu, India

ABSTRACT

Micro calcification is a tiny abnormal deposit of calcium salt especially in the breast cancer that in the human female is often an indicator of breast cancer. In currently the micro calcification cluster is a important primary sign of breast cancer. The breast cancer is detected the early stage and it is identify the benign or malignant. The existing approaches are tend to concentrate on to the morphological of micro calcification and/or statistical cluster features. In this paper, the proposed method is K-Means techniques are used to detect the malignant or benign. A graph generation is a set of micro calcification is to represent the multiple scale at topological structure of micro calcification clusters.

Keywords: Micro Calcification, Segmentation

I. INTRODUCTION

Breast cancer is one of the type of cancer which is seen in humans and is one of the deadliest diseases. Early detection of breast cancer the patients gives a good chance of survival, whereas the late detection can cause death .A breast cancer is only detected can be classified as benign or malignant. It is one of the most difficult to differentiate between a benign micro calcification from one that is malignant micro calcification. Medical image processing is the process of creating the visual representation of inside part of the body for clinical analysis and medical intervention. Image processing is the process of dividing a digital image into multiple segmentation. Goal of segmentation is to simply and /or change the image representation in to something that is more meaningful and easier to analyze. It is based on the measurement taken from the image and might be texture, gray level, color, depth or motion. Mammography is used as a screening tool and diagnostic. Screening mammogram is performed to attempt to detect breast cancer before symptoms occur. The goal of screening mammography programs is to decrease mortality from breast cancer. Diagnostic mammogram is performed to help detect breast cancer if a woman has symptoms, such as a lump that can be felt in her breast. The goal of

mammography is one of the early detection of breast cancer, typically through detection of characteristics masses and /or micro calcifications. Mammography is to detect the around 80% to 90%of breast cancers. The mammography is used with the masses and abnormalities detection at early stage is quite possible. There are several steps of breast image processing ,first step is read the input image ,next step is pre-processing, segmentation, morphological operation, micro calcification graph generation, feature extraction, classification and finally detect the images are malignant or benign .Morphological is used on gray value image, if viewed as a stack to binary image. The morphological characteristics of micro calcification could be used to difference between benign or malignant cases. It is difficult and time consuming for radiologists to differentiate between malignant from benign micro calcification. The morphological features and shape are based on mainly extracted from the individual micro calcification and describe the morphological characteristics of individual micro calcification , such as size and shape. The proposed method for modeling and classifying the micro calcification clusters in mammogram is based on the topological properties. A set of topological features are used to extracted from the micro calcification graph at the multiple scales, and the multi scale topological


feature is generated to differentiate between the benign or malignant cases.

II. METHODS AND MATERIAL

A. Proposed Method:

In this paper, the proposed method is to classify the stages of malignant or benign of breast cancer is to base on the mammogram image, through segmentation by K-Means cluster method.

Flow Diagram

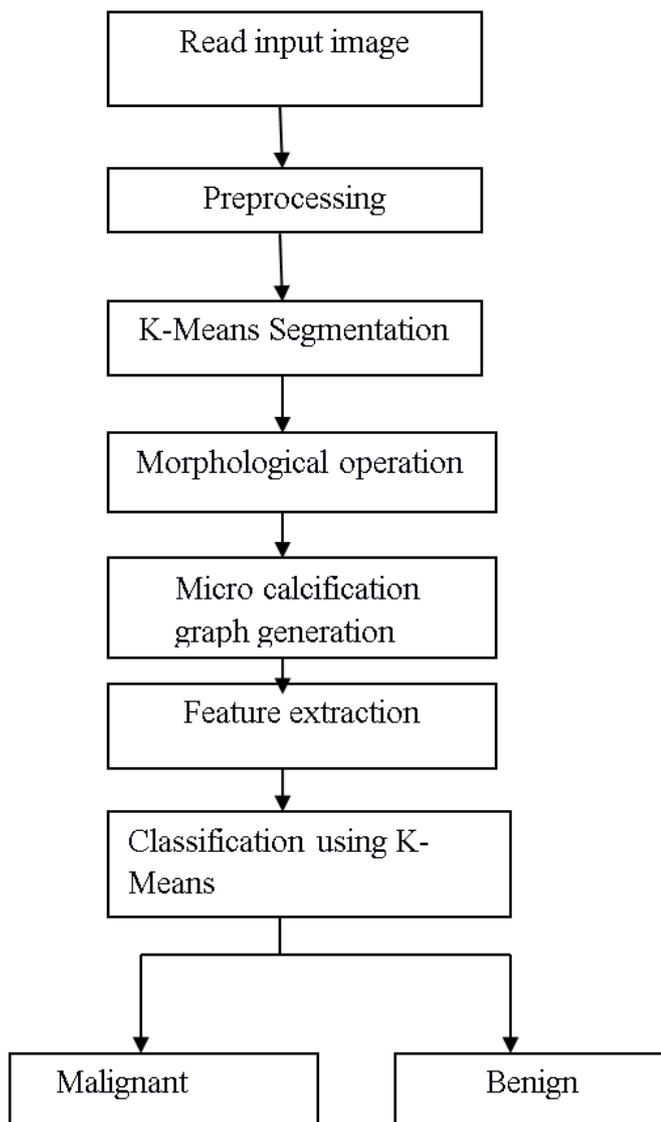

A. **Preprocessing** : Preprocessing phase is needed to improve the image quality and make the segmentation results more accurate. First we remove the unwanted parts in the background of the mammogram. The objective of this process is to

improve the quality of the image, to make it ready for further processing. Removing the irrelevant parts of the image is done by increasing contrast of the mammogram using threshold value. This image is converted into a rgb image to lab.

B. **Segmentation** : Segmentation is the process of confining a digital image into multiple segments. By segmentation technique it is easy to change the representation of an image so it will be easier to analyze and it is easy to locate objects and boundaries in images. In this technique image can be segmented and the set of segments will cover the entire image.

C. **Morphological Operation** : The techniques of image processing based on the shape. The value of each pixel in the output image is based on a comparison of the corresponding pixel with its neighbors in the input image. By choosing the size and shape of the neighborhood, you can construct a morphological operation that adapts to specific shapes in the input image. Add pixels to the boundaries of object in the image.

D. **Micro Calcification Graph Generation**: In this step, we are using a multiple scale. It is generated to the spatial connectivity relationship between micro calcification with in the clusters. The individual micro calcification is based on corresponding to the each nodes to represents an edge between two nodes are created if the two corresponding micro calcification are connected.

E. **Feature Extraction**: Over a range of scales micro calcification graph is a set of graph theoretical features can be extracted to express the topological properties of micro calcification clusters. These features will constitute the feature space for the classification of malignant and benign clusters. Before extracting the topological features of micro calcification clusters, we first provide the following definitions for general graphs. Further definitions for graphs can be found in [32]. Here, we use $G(V,E)$ to represent a graph, where V is the vertex set and E is the edge set, and use $|V|$ (the cardinality of V) and $|E|$ (the cardinality of E) to denote the number of vertices and the number of edges in G , respectively. G_{conn} denotes the sub graph of G that corresponds to the largest connected component.

Definition 1: The adjacency matrix $A(i, j)$ of a graph $G(V,E)$ is a $|V| \times |V|$ matrix, defined as

$$A(i, j) = \begin{cases} 1, & \text{if } (i, j) \in E \\ 0, & \text{otherwise} \end{cases}$$

Where $(i, j) \in E$ indicates (i, j) is an edge, there is an edge between vertex j and G .

Definition 2: The degree matrix $D(i, j)$ of a graph $G(V, E)$ is a $|V| \times |V|$ diagonal matrix containing the degree of vertex i at entry (i, j) , defined as

$$D(i, j) = \begin{cases} d(i), & \text{if } i = j \\ 0, & \text{otherwise} \end{cases}$$

$d(i) = \sum_{j \in V} a_{ij}$ is the number of edges incident to vertex i and $\sum_{i \in V} d(i) = 2|E|$.

K-Means: K-Means is a method of clustering which allows a piece of data to be a member of two or more clusters.

The K-Means algorithm consists of the following steps:

Let $X = \{x_1, x_2, x_3, \dots, x_n\}$ be the set of data points and $V = \{v_1, v_2, \dots, v_c\}$ be the set of centers.

- 1) Randomly select 'c' cluster centers.
- 2) Calculate the distance between each data point and cluster centers.
- 3) Assign the data point to the cluster center whose distance from the cluster center is minimum of all the cluster centers.
- 4) Recalculate the new cluster center using:

$$v_i = \left(\frac{1}{c_i} \right) \sum_{j=1}^{c_i} x_j$$

Where, ' c_i ' represents the number of data points in i^{th} cluster.

- 5) Recalculate the distance between each data point and new obtained cluster centers

III. RESULTS AND DISCUSSION



Figure 3.1 : Dilation Result



Figure 3.2 : Biograph Viewer

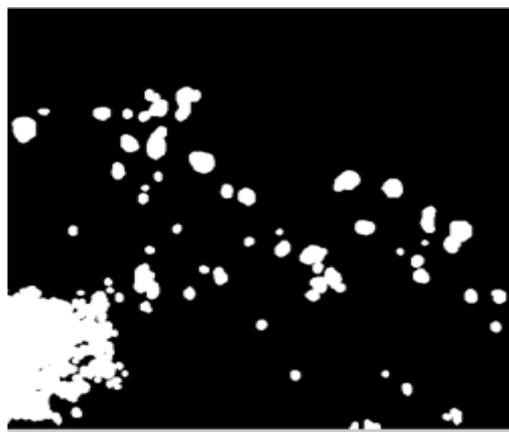


Figure 3.3 : Dilation Result



Figure 3.4 : Biograph Viewer

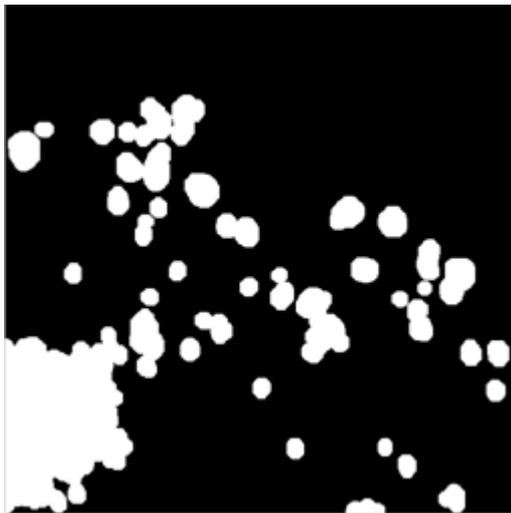


Figure 3.5 :Dilation Result



Figure 3.6 : Biograph Viewer

IV. CONCLUSION

The paper presented k-means method for determining the stage of breast cancer malignant or benign based on the size of the cancer on the mammogram image basis. In previous publication is extracted at a single scale, micro calcification cluster is a representation of covering a multi scale characteristics was developed in this paper. The resulting eight graph feature sets were aggregated and constituted the multi scale topological feature vector, which has been used to classify the micro calcification clusters into malignant or benign.

V. REFERENCES

[1] Zhili Chen*, Harry Strange, Arnau Oliver, Erika R. E. Denton, Caroline Boggis, and Reyer Zwiggelaar, " Topological Modeling and Classification of Mammographic Micro calcification Clusters", IEEE transactions on biomedical engineering, vol. 62, NO. 4, APRIL 2015.

[2] Heang-Ping Chany, Berkman Sahiner, Nicholas Petrick" Computerized classification of malignant and benign microcalcifications on mammograms: texture analysis using an artificial neural network,IEEE transactions on biomedical engineering,(2001).

[3] Nizar Ben Hamad, Mohamed Ellauze* and Med Salim Bouhlel" Wavelets Investigation for Computer Aided Detection of Micro calcification in Breast Cancer" IEEE transaction 978-1-4244-3757-3/09/\$25.00 ©2009.4

[4] F. Dehghan, H. Abrishami-Moghaddam, M. Giti" Automatic Detection of Clustered Micro calcifications in Digital Mammograms: Study on Applying Adaboost with SVM-based Component Classifiers"IEEE transaction August 20-24, 2008.

[5] Robert M. Nishikawa, Dulcy E. Wolverton" Computerized Classification of Malignant and benign Clustered Micro calcifications in Mammograms"IEEE transaction Oct. 30 - Nov. 2, 1997 Chicago, IL. USA

[6] Shrinivas D Desai, Megha G" Detection of Micro calcification in Digital Mammograms by Improved-MMGW Segmentation Algorithm"IEEE transaction on 2013.

[7] Liang Shen, Rangaraj M. Rangayyan, and J. E. Leo Desautels" Application of Shape Analysis to Mammographic Calcifications" IEEE transactions on Medical imaging, vol 13. no. 2. June 1994.

[8] Joachim Dengler, Sabine Behrens, and Johann Friedrich Desaga" Segmentation of Micro calcifications in Mammograms" IEEE transactions on Medical imaging, vol. 12, no. 4, december 1993.

[9] Caro Lucas, Gelareh Mortezaie" Analysis of Mammographic Micro calcifications Using gray – level Images and Neural Networks" IEEE transactions on medical imaging, vol. 12, no. 4, december 2001.

[10] 10. Ayman A. AbuBaker" Automatic Micro calcification Detection Using Wavelet Transform" International Journal of Computer Theory and Engineering, Vol. 7, No. 1, February 2015.

[11] H.Strange et al.,"Modelling mammographic micro calcification clusters using persistent mereotopology",Pattern Recog.Lett.,vol.47,pp.157-163,2014.

[12] Chun-Ming Chang and Andrew Laine"Coherence of Multiscale Features for Enhancement of Digital

Mammograms"IEEE trans on information tech in biomedical,vol.,3,march 1999.

- [13] A. F. Laine, S. Schuler, J. Fan, and W. Huda, "Mammographic feature enhancement by multiscale analysis," IEEE Trans. Med. Imag., vol. 13, pp. 725–740, Apr. 1994.
- [14] Chen et al., "Analysis of mammographic micro calcification clusters using topological features," in Breast Imaging (ser. Lecture Notes in ComputerScience), vol. 8539, H. Fujita, T. Hara, and C. Muramatsu, Eds. NewYork, NY, USA: Springer, 2014, pp. 620–627.
- [15] J. Dengler et al., "Segmentation of micro calcifications in mammograms,"IEEE Trans. Med.Imag., vol. 12, no. 4, pp. 634–642, Dec. 1993.