



A Result Paper on Agricultural Electric Vehicle Development and Design - Wiring Harness and Battery Selection

Prof. G. R. Padule, Nalawade S. R, Chavan T. B, Adat V. B

Department of Electrical Engineering, Savitribai Phule Pune University, Maharashtra, India

ABSTRACT

Electric vehicles (EVs) represent a promising and sustainable mode of transportation that reduces greenhouse gas emissions and dependence on fossil fuels. battery and wiring harness playing key roles. This abstract provides an overview of the selection of batteries and wiring harnesses for electric vehicles. Battery selection involves evaluating various parameters, including energy density, power density, cycle life, and cost. Lithium-ion batteries are the most commonly used technology due to their high energy density, long cycle life, and low self-discharge rates. The wiring harness in an electric vehicle is a complex network of wires and connectors that connects various electrical components, including the battery, motor, inverters, and other vehicle systems appropriate wiring harness is critical to ensure the efficient flow of power and data throughout the vehicle

Keywords: battery, wiring, charger, controller, DC-DC convertor.

I. INTRODUCTION

A battery is a device that is used for providing electrical energy. It consists of one or more electrochemical cells that convert chemical energy into electrical energy. Batteries are widely used in various applications to power electronic devices, vehicles, and a multitude of other systems. Here are some key characteristics of batteries Energy Storage During charging, the battery stores energy by converting electrical energy into chemical energy, and during discharge, it converts the chemical energy back into electrical energy. This stored energy can be used to power various devices. Selecting the right battery is essential for ensuring reliable and efficient operation in a wide range of applications. Here's an introduction to battery selection. There are several types of batteries, such as lead-acid, lithium-ion, nickel-metal hydride, and more. Each type has its unique characteristics, including voltage, capacity, and cycle life. Understanding the voltage and capacity requirements of the application is crucial. Voltage determines the electrical potential, while capacity defines how much energy the battery can store. Some applications demand batteries with long cycle life, meaning they can be charged and discharged many times without significant degradation. Considerations include the environmental impact, recycling options, and safety features, especially for applications where battery failure can lead to hazardous situations.

A wiring harness is a structured assembly of wires, connectors, and other components used to transmit electrical signals and power within various devices and systems. Wiring harnesses serve to simplify and

organize complex electrical connections within an application, such as a vehicle or electronic device. They ensure efficient transmission of power and data. They also improve reliability by minimizing interference and signal loss. Both battery selection and wiring harness design are essential considerations in the design and operation of various systems, and they significantly impact the efficiency, safety, and performance of these systems.

II. LITERATURE SURVEY

[1] Fayez Alanazi "Electric Vehicles: Benefits, Challenges, and Potential Solutions for Widespread Adaptation" authored by Fayez Alanazi, the author discusses the critical issues currently facing the primary modes of transportation worldwide. These issues encompass the increasing costs of oil and the escalating levels of carbon emissions. Consequently, electric vehicles (EVs) have been gaining significant popularity due to their independence from oil and their minimal greenhouse gas emissions. However, despite their numerous advantages, there remain notable operational challenges that must be addressed to facilitate the broad adoption of EVs. This research delves into the historical evolution of EVs and emphasizes their environmental advantages, such as reducing carbon emissions and mitigating air pollution. Additionally, it explores the obstacles and complexities associated with EV adoption, including the high infrastructure costs, the limited availability of charging stations, range limitations leading to range anxiety, and battery performance. To surmount these challenges, the paper suggests potential solutions, including the enhancement of charging infrastructure, the expansion of the charging station network, the implementation of battery swapping techniques, and the advancement of battery technology to alleviate range anxiety and reduce charging durations. Governments can also play a crucial role by encouraging consumers through measures such as tax credits or subsidies and investing in the development of a robust charging infrastructure.

[2] A.K.M.Ahasan Habib et al., "Lithium-Ion Battery Management System for Electric Vehicles: Constraints, Challenges, and Recommendations" by A. K. M. Ahasan Habib and co-authors, the authors underscore the growing demand for electric vehicles driven by the need for energy storage solutions that are more flexible, manageable, and efficient. These electric vehicles rely on robust battery packs to power their electric motors. It is essential to have a deep understanding of various battery characteristics, such as power density, longevity, electrochemical behavior, and temperature tolerance. Battery management systems play a critical role in electric vehicles and renewable energy storage systems. The battery management system encompasses essential functions such as monitoring voltage and current, estimating charge and discharge processes, ensuring protection and equalization, managing thermal considerations, and collecting and storing battery data. Moreover, this study delves into the characterization of various cell balancing circuit types, examining their components and considering factors like current and voltage stresses, control reliability, power loss, efficiency, size, and cost, while also evaluating their benefits and drawbacks. The paper identifies concerns and challenges in battery management systems and provides recommendations to optimize battery performance sustainably in electric vehicles and renewable energy storage systems. The paper concludes by highlighting areas that require further research.

[3] Gerfried Jungmeier et al., "Key Issues in Life Cycle Assessment of Electric Vehicles - Findings in the International Energy Agency (IEA) on Hybrid and Electric Vehicles (HEV)," authored by Gerfried Jungmeier and colleagues, the focus is on the potential of electric vehicles to substitute for conventional vehicles and contribute to the sustainable development of the global transportation sector. the sustainability of electric

vehicles comprehensively is feasible through life cycle assessment (LCA), which encompasses the entire life cycle of the vehicles, from production and operation to end-of-life considerations. The International Energy Agency (IEA) Implementing Agreement on Hybrid and Electric Vehicles (IA-HEV) conducts LCA activities across 17 member countries and operates a task on the LCA of electric vehicles. This task, known as Task 19, titled "Life Cycle Assessment of Electric Vehicles - From raw material resources to waste management of vehicles with an electric drivetrain," identifies and applies seven categories of key issues for applying LCA to electric vehicles and hybrid electric vehicles. These categories cover general issues, life cycle modelling, the vehicle cycle (production, use, and end-of-life considerations), the fuel cycle (electricity production), inventory analyses, impact assessment, and reference systems. The paper provides detailed insights into the main relevant factors associated with these key issues.

[4] Jinliang Zhang et al., "Data Analysis of the Electric Vehicle's Current and Speed Based on the Actual Road Condition" authored by Jinliang Zhang and colleagues, the study investigates the relationship between battery current and the speed of electric vehicles. The researchers design a comprehensive electric vehicle information acquisition system, which is installed in existing electric vehicles through a well-planned wiring arrangement. They select two distinct road conditions, namely flat roads and uphill terrain, based on the actual environment, and design experimental schemes to evaluate these conditions separately. Subsequently, they analyze the collected data in detail. This research serves as a valuable foundation for validating models, establishing new models, and advancing theoretical research in the field of electric vehicles.

[5] Zhou Xin Chen Shouping "Study on Insulation Detection Method of Electric Vehicles Based on Single Point of Failure Model" authored by Zhou Xin and Chen Shuping, the authors introduce an innovative approach for detecting insulation resistance in electric vehicle battery packs based on the single point of failure model. The paper provides a comprehensive analysis of the underlying principles and the derivation of relevant equations. The method's effectiveness is evaluated by comparing the measurement results with the relevant national standards of the People's Republic of China, specifically GBT 18384.1-2001, which pertains to insulation resistance in electric vehicles. The paper discusses the feasibility and practical significance of the proposed method, particularly when a single point wiring insulation failure occurs in the battery pack. The method can pinpoint the location of the failure based on potential values and offers a convenient means for online troubleshooting.

III.METHODOLOGY

The methodology for selecting electric vehicle (EV) batteries and designing wiring harnesses involves a systematic approach to ensure that the chosen components meet performance, safety, and cost objectives. It is essential to clearly define the requirements of the application, taking into consideration factors such as voltage, capacity (energy storage), power output, cycle life, operating temperature range, and weight constraints. Calculate the necessary energy (in kWh) and power (in kW) based on the application's energy and power demands. Evaluate safety features associated with different battery chemistries, including thermal management systems, protection circuitry, and resistance to thermal runaway. A comprehensive cost analysis, covering initial purchase costs, operational expenses, and total cost of ownership over the battery's expected lifespan, should be conducted.

Designing a wiring harness for electrical systems, including those in electric vehicles (EVs), follows a systematic methodology to guarantee that the wiring harness satisfies performance, safety, and reliability requirements.

Calculate the electrical load and power requirements of each component to determine wire size (gauge) and capacity. Differentiate between high-voltage and low-voltage wiring within the harness, ensuring proper insulation and safety measures for high-voltage components.

IV. PROPOSED SYSTEM

A. Architecture

The entire document should be in Times New Roman or Times font. Type 3 fonts must not be used. Other font types may be used if needed for special purposes.

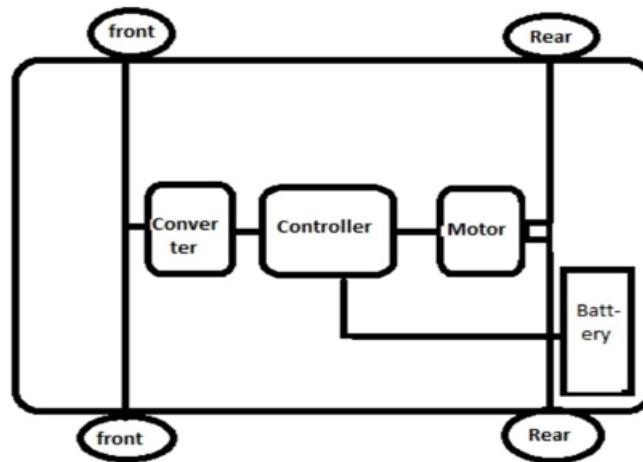


Figure1:Architecture

B. Hardware Requirements

Hardware:

Lithium-ion Battery
DC-DC Converter
Wires, Cables
Electrical Equipment

V. RESULT

A. Wiring harness

The design of the wiring harness is crucial, with careful attention paid to factors such as wire length and gauge. Wire length directly affects resistance and voltage drop; as it increases, so does both. Using high-quality materials enhances efficiency and reduces voltage drop. Testing has shown that shorter wire lengths and better materials yield more satisfactory output.

Consequently, employing high-quality materials enhances performance and functional capacity. High-quality equipment exhibits lower resistance and higher output capacity in equipment connections. Hence, 1mm gauge wire, renowned for its reliability, is preferred.

The installation of the wiring is straightforward, and the use of high-quality materials simplifies maintenance. Employing high-quality pipe and wire insulation safeguards against high temperatures and overheating.

TABLE I

Wire Gauge in mm	Required current	Current capacity
1.5mm	16A	22A
2.5mm	24A	29A
4mm	34A	40A
6mm	45A	52A

B. Battery selection

In electrical vehicle most important is battery they have factor are consider forming battery

- Safty
- Cost
- Ratings
- Lifespan
- Specific energy

TABLE III

Parameter's	Rating's
Battery watt's	2900 W
Battery Capacity	25 A
Maximum Output Current	50 A
Voltage Rating	58.8 V
Efficiency	86 %
Charging Time	2.30 to 3.00 hrs

VI. CONCLUSION

The conclusion of developing an electric vehicle wiring harness and battery selection involves summarizing the key findings, outcomes, and implications of the process. This includes discussing the effectiveness of the chosen wiring harness in terms of efficiency, reliability, and safety, as well as evaluating the selected battery in terms of energy density, power output, and overall performance. recommendations for future improvements or areas of further research can be suggested to enhance the electric vehicle's overall performance and sustainability. envelopment process and how they were addressed. Finally, recommendations for future improvements or areas of further research can be suggested to enhance the electric vehicle's overall performance and sustainability.

VII. REFERENCES

- [1]. Fayeze Alanazi, "Electric Vehicles: Benefits, Challenges, and Potential Solutions for Widespread Adaptation," May 13, 2023.

- [2]. Ghassan F. Issa et al., "Lithium-Ion Battery Management System for Electric Vehicles: Constraints, Challenges, and Recommendations," February 27, 2023.
- [3]. Gerfried Jungmeier et al., "Key Issues in Life Cycle Assessment of Electric Vehicles - Findings in the International Energy Agency (IEA) on Hybrid and Electric Vehicles (HEV)," November 17, 2013.
- [4]. Jinliang Zhang et al., "Data Analysis of the Electric Vehicle's Current and Speed Based on the Actual Road Condition," 2013.
- [5]. Zhou Xin Chen Shouping, "Study on Insulation Detection Method of Electric Vehicles Based on Single Point of Failure Model," 2016.
- [6]. Sreeram K. Preetha et al., "Electric Vehicle Scenario in India: Roadmap, Challenges and Opportunities," 2019